

BOE-THERM

*Your reliable
partner in
Temperature
Control Units*



TEMP 350

Temperature control unit for Thermal oil up to 350 °C

- ❖ High isolation against heat loss
- ❖ Easy operation
- ❖ Pressure less operation
- ❖ Low noise




P machinery

BOE-THERM

TEMP 350

Equipment:	Standard	Optional
Automatic restart	•	
Temperature deviation alarm	•	
Automatic water refilling	•	
Vacuum during operation		•
Mould draining		•
Automatic cool down function	•	
Connection for external PT 100 sensor		•
Service indicator (hour counter)	•	
Serial interface 20 mA CL		•
Analog interface 4-20 mA		•
Profibus		•
Ethernet/IP		•
Profinet		•
Devicenet		•

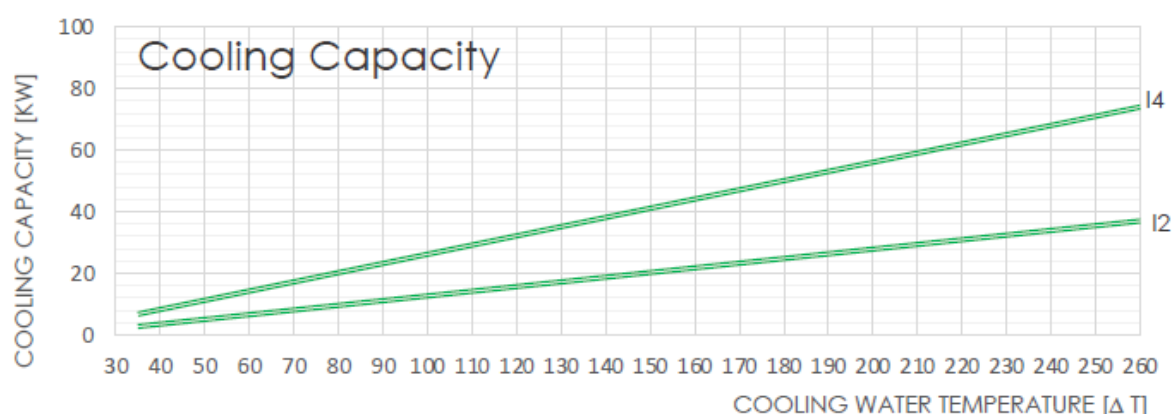

Technical Specifications:

Max outlet temperature	350 °C	
Heating capacity	9 kW (opt. 12 - 18 - 24 - 36 kW)	
Heat transfer fluid	Oil	
Tank volumen	Internal	External
9-12 kW	27 liter	23 liter
18 kW	49 liter	27 liter
24-36 kW	65 liter	11 liter
Pump	std.	
Type	P3	P4
Flow rate max. l/min	66	80
Pressure max. Bar	3,4	4,4
Cooling capacity at ΔT = 250 °C	std.	
Type	12	14
kW	36	72
Connections in/out	Process 1/2" - Cooling 3/8"	
Operating voltage std.	3x400V/50Hz	
Dimensions (L x W x H)	Up to 12 kW - 855 x 495 x 910 mm	
	Up to 36 kW - 1065 x 555 x 1000 mm	